




PISTOL GRIP INTERNAL THREAD MICROMETERS




digital indicator is optional

3126-M20

- Measure pitch diameter of screw threads
- Extension rods are included
- Optional accessory: setting thread ring gauges (code **4120-XX-ST**, code **4129-XX-ST**), digital indicators (code **2103-10F**)

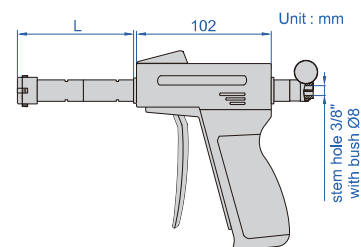

Code	Range	Accuracy	Extension rod (included)	L
3126-M7	M7-8x1	8μm	100mm	50mm
3126-M8	M8x1.25	8μm	100mm	50mm
3126-M10	M10x1.5	8μm	100mm	50mm
3126-M12	M12x1.75	8μm	100mm	50mm
3126-M16	M15-16x2	8μm	150mm	65mm
3126-M20	M19-20x2.5	8μm	150mm	65mm
3126-M24	M23-25x3	8μm	150mm	91mm
3126-M30	M29-30x3.5	8μm	150mm	91mm
3126-M33	M33-40x3.5	8μm	150mm	97mm
3126-M39	M34-40x4	8μm	150mm	97mm
3126-M45	M44-50x4.5	8μm	150mm	97mm
3126-M48	M45-50x5	8μm	150mm	97mm
3126-M56	M56-63x5.5	8μm	150mm	112mm
3126-M68	M68-75x6	8μm	150mm	112mm

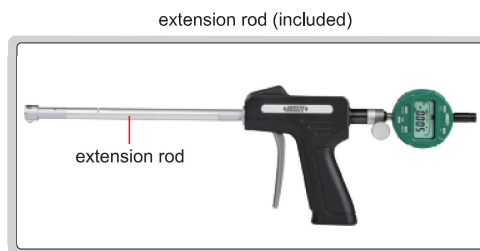

* To ensure accuracy, please calibrate the micrometer using a setting thread ring gauge of the same specification before measurement.

Example: code **3126-M7**, measuring range M7-8x1,

For measuring thread M7x1, use setting ring **4120-7-ST (optional)** to calibrate the micrometer before measurement,

For measuring thread M8x1, use setting ring **4129-8P-ST (optional)** to calibrate the micrometer before measurement