

DIGITAL POINT MICROMETERS/SNAP GAUGES

ONE TURN OF SLEEVE MAKES 10MM SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS 3MM

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

MEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVE

NON-ROTATING
SPINDLE

DATA
OUTPUT

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING




IP65
WATERPROOF

**INSPECTION
CERTIFICATE**



3354-251

- Measure the web thickness of drills, small grooves and keyways
- Absolute encoder, the original data remains after power off
- Resolution: 0.001mm/0.00005"
- One turn of sleeve makes 10mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Carbide measuring faces
- Measuring force 5-10N
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch
- Supplied with gauge blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

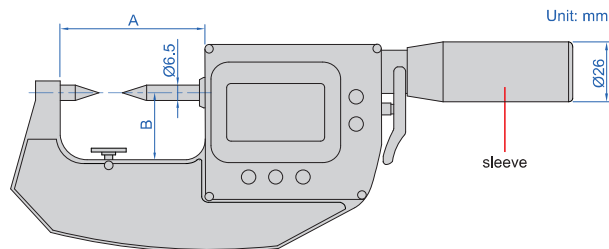

alarm when
over tolerance

With data interface (optional wireless transmitter code 7315-3350, receiver is needed)

Code	Range	Type	Accuracy	Repeatability	A	B
3354-251 *	0-25mm/0-1"	A	2μm	1μm	64mm	32.5mm
3354-501 *	25-50mm/1-2"	A	2μm	1μm	89mm	46mm
3354-751 *	50-75mm/2-3"	A	3μm	1μm	114mm	60mm
3354-252 *	0-25mm/0-1"	B	2μm	1μm	64mm	32.5mm
3354-502 *	25-50mm/1-2"	B	2μm	1μm	89mm	46mm
3354-752 *	50-75mm/2-3"	B	3μm	1μm	114mm	60mm

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code	Range	Type	Accuracy	Repeatability	A	B
3354-251WL *	0-25mm/0-1"	A	2μm	1μm	64mm	32.5mm
3354-501WL *	25-50mm/1-2"	A	2μm	1μm	89mm	46mm
3354-751WL *	50-75mm/2-3"	A	3μm	1μm	114mm	60mm
3354-252WL *	0-25mm/0-1"	B	2μm	1μm	64mm	32.5mm
3354-502WL *	25-50mm/1-2"	B	2μm	1μm	89mm	46mm
3354-752WL *	50-75mm/2-3"	B	3μm	1μm	114mm	60mm

* Supplied with manufacturer inspection certificate

