

ELECTRONIC BALANCES

DATA OUTPUT

- Zero-setting, weighing, subtracting tare value, simple counting
- Data output
- Unit: g, ct, ozt



windshield
(included in 8301-300,
8301-600 and 8301-1200)




calibration weight
(included in 8301-300,
8301-600 and 8301-1200)



printer (optional)



8301-3000

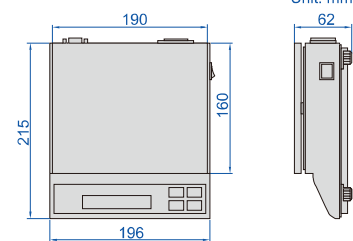

Unit: mm

SPECIFICATION

Code	8301-300	8301-600	8301-1200	8301-3000	8301-6000
Weighing capacity	300g	600g	1200g	3000g	6000g
Minimal load	0.2g	0.2g	0.5g	2g	2g
Readability (d)	0.01g	0.01g	0.01g	0.1g	0.1g
Repeatability	±0.01g	±0.01g	±0.02g	±0.1g	±0.2g
Linearity	±0.02g	±0.02g	±0.03g	±0.2g	±0.4g
Stabilization time	2s		3s	2s	4s
Dimension of pan	Ø135mm			190×160mm	
Output	RS232				
Operation temperature	0~40°C				
Operation humidity	≤80%RH				
Power supply	220V, 50/60Hz				
Dimension (L×W×H)	215×196×62mm				

OPTIONAL ACCESSORY

RS232 cable	8301-CABLE*
Data output cable (keyboard format)	7302-8301
Wireless transmitter	7315-8301**
Printer	8391-PRN10

* Used to connect with computers

** Receivers are needed: code 7315-2/3/6/7/8/9