

INDUSTRIAL ELECTRONIC BALANCES (BASIC TYPE)


- Double weighing pan in 201 stainless steel and plastic
- Zero-setting, weighing, subtracting tare value, simple counting
- LCD display, with backlight
- Unit: g, lb, ct, oz



printer (optional)

8306-20AD

Unit: mm

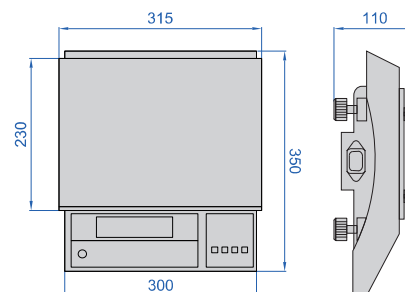

SPECIFICATION

Dimension of pan	315×230mm
Operation temperature	-10~40°C
Operation humidity	≤85%RH
Power supply	rechargeable lead acid battery (6V/4Ah)
Dimension (L×W×H)	350×315×110mm

Code	Weighing capacity	Minimal load	Readability (d)	Repeatability	Linearity	Stabilization time	Output
8306-10	10kg	20g	1g	2g	±2g	2s	no
8306-15	15kg	20g	1g	2g	±4g	2s	
8306-20	20kg	20g	1g	2g	±5g	2s	
8306-30	30kg	20g	1g	3g	±5g	2s	
8306-5A	5kg	5g	0.1g	0.2g	±0.5g	2s	
8306-10A	10kg	5g	0.1g	0.2g	m≤5kg: ±0.5g; m>5kg: ±0.6g	3s	
8306-15A	15kg	5g	0.1g	0.3g	m≤5kg: ±0.5g; m>5kg: ±0.6g	3s	
8306-20A	20kg	5g	0.1g	0.3g	m≤5kg: ±0.5g; m>5kg: ±0.8g	4s	RS232
8306-10D	10kg	20g	1g	2g	±2g	2s	
8306-15D	15kg	20g	1g	2g	±4g	2s	
8306-20D	20kg	20g	1g	2g	±5g	2s	
8306-30D	30kg	20g	1g	3g	±5g	2s	
8306-5AD	5kg	5g	0.1g	0.2g	±0.5g	2s	
8306-10AD	10kg	5g	0.1g	0.2g	m≤5kg: ±0.5g; m>5kg: ±0.6g	3s	
8306-15AD	15kg	5g	0.1g	0.3g	m≤5kg: ±0.5g; m>5kg: ±0.6g	3s	
8306-20AD	20kg	5g	0.1g	0.3g	m≤5kg: ±0.5g; m>5kg: ±0.8g	4s	

OPTIONAL ACCESSORY (for scales with RS232)

RS232 cable	8306-CABLE*
Printer	8391-PRN10

* Used to connect with computers