

ELECTRONIC ANALYTICAL BALANCES (BASIC TYPE)

DATA OUTPUT


- Downward-mounted electromagnetic sensor
- Aluminum alloy base, wind shield, three side glass sliding doors
- Zero-setting, weighing, subtracting tare value, simple counting
- LCD display, with backlight
- Data output
- Unit: g, ct, oz, ozt



class F1 calibration weight
(included)



printer (optional)

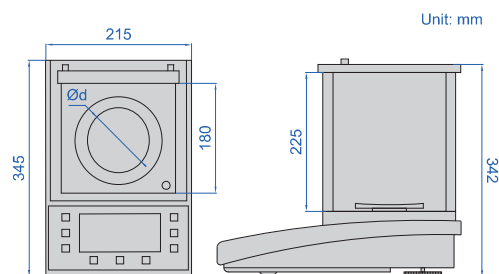

8311-220

SPECIFICATION

Code	8311-60	8311-120	8311-220
Weighing capacity	60g	120g	220g
Minimal load	10mg	10mg	10mg
Readability (d)	0.1mg	0.1mg	0.1mg
Repeatability	±0.5mg		
Linearity	±0.5mg		
Stabilization time	2.5s		
Dimension of pan (∅d)	∅80mm		
Output	RS232		
Operation temperature	10~30°C		
Operation humidity	20~85%RH		
Power supply	power adapter (12V/1A)		
Dimension (L×W×H)	345×215×342mm		

STANDARD DELIVERY

Main unit	1 pc
Calibration weight	1 pc

OPTIONAL ACCESSORY

RS232 cable	8311-CABLE*
Data output cable (keyboard format)	7302-8311
Wireless transmitter	7315-8311**
Printer	8391-PRN10

* Used to connect with computers

** Receivers are needed: code 7315-2/3/6/7/8/9