

SEMIMICRO ELECTRONIC BALANCES


INSIZE PLUS

INTERNAL CALIBRATION


HIGH ACCURACY

DATA OUTPUT


- Downward-mounted electromagnetic sensor
- Aluminum alloy base, wind shield, three side glass sliding doors
- Zero-setting, weighing, subtracting tare value, counting
- Checking alarm, accumulation, animal scale, percentage display
- Peak (max.) and tracking mode
- Administrator permissions
- Recipe database: 99 recipes, up to 20 ingredients per recipe
- LCD display, with backlight
- Data output
- Automatic power off
- Unit: g, mg, ct, oz, ozt, dwt, mlb, GN, tj, gj, mo

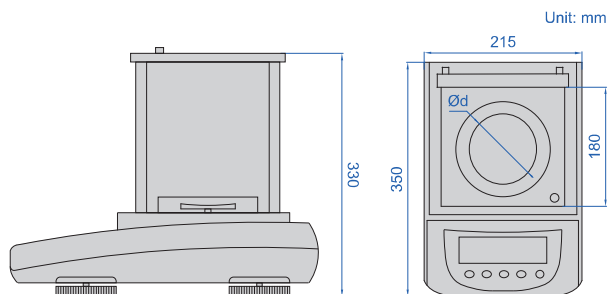


8313-62A

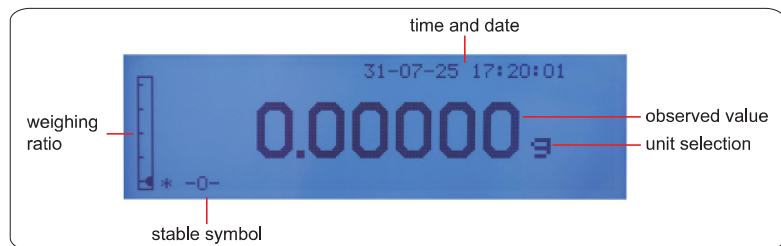

weighing test Interface



grid weighing pan (included)



wind protection ring (included)

SPECIFICATION

Code	8313-42A	8313-62A
Calibration method	internal calibration	
Weighing capacity	42g	62g
Minimal load	1mg	1mg
Readability (d)	0.01mg	0.01mg
Repeatability	±0.03mg	
Linearity	±0.08mg	
Stabilization time	6s	
Dimension of pan (Ød)	Ø80mm	
Output	RS232	
Operation temperature	18~23°C	
Operation humidity	20~85%RH	
Power supply	power adapter (24V/1A)	
Dimension (L×W×H)	350×215×345mm	

STANDARD DELIVERY

Electronic balance	1 pc
Grid weighing pan	1 pc
Wind protection ring	1 pc
Gloves	1 pair

OPTIONAL ACCESSORY

RS232 cable	8311-CABLE*
Portable ioniser	8312-PI
Printer	8391-PRN10

* Used to connect with computers



printer (optional)



portable ioniser (optional)