

## DYNAMIC SCALES

- Zero-setting, weighing, subtracting tare value, simple counting
- Checking alarm, accumulation, animal scale
- Upper and lower limit alarms: quantity, weight
- Stabilization time: 0.8s
- LCD display, with backlight
- Data output
- Automatic power off
- Unit: kg, lb, g, oz


DATA  
OUTPUT

HIGH SPEED RESPONSE


CAN BE  
CUSTOMIZED



metal communication  
cable (included)

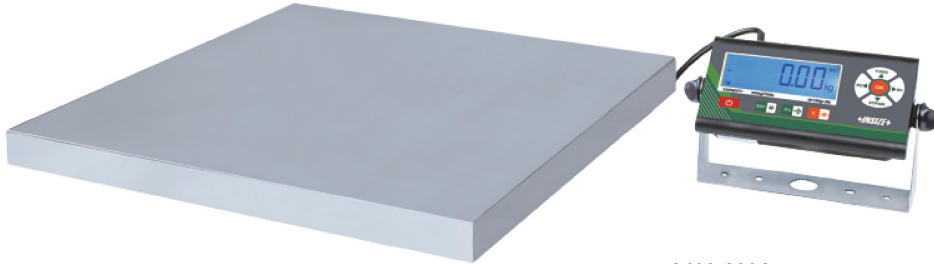

8409-200A

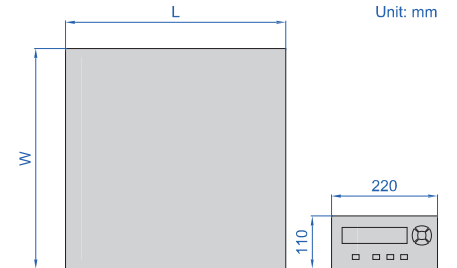

### SPECIFICATION

Material of platform	201 stainless steel
Material of indicator	ABS plastic
Output	RS232
Operation temperature	-10~40°C
Operation humidity	≤85%RH
Power supply	7.4V rechargeable Li-ion battery

Code	Weighing capacity	Minimal load	Readability (d)	Repeatability	Linearity	Dimension of platform (L×W)
8409-300A	300kg	2kg	100g	±200g	±300g	500×900mm
8409-200A	200kg	1kg	50g	±100g	±150g	
8409-300B	300kg	1kg	50g	±100g	±150g	500×500mm
8409-200B	200kg	400g	20g	±40g	±60g	