


DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS


DATA
OUTPUT




short spherical/flat points (included)




long spherical/flat points (included)




short spherical blade points (included)



long spherical blade points (included)



1124-300A

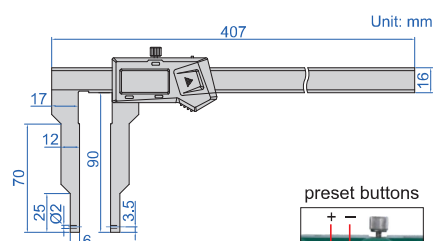


preset buttons




zero setting block for
external measurement
(included)



measure internal and
external grooves

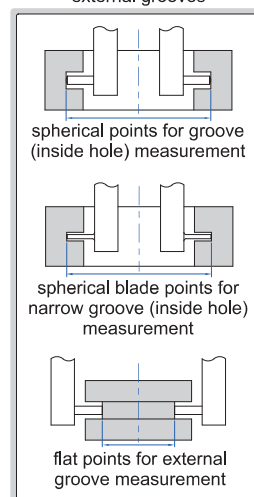

- Non waterproof
- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143)



depth stop 6143
(optional)



With data interface


| Code | Data output cable (optional) |
|-----------|---------------------------------------|
| 1124-300A | 7315-25 (receiver is needed), 7302-21 |

Built-in wireless

| Code | Receiver (optional) |
|-------------|-----------------------|
| 1124-300AWL | code 7315-2/3/6/7/8/9 |

| Point | Range | Accuracy | Application |
|------------------------------|---|----------|---|
| short spherical/flat points | 24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external) | ±0.04mm | spherical points for grooves inside hole (small hole) flat points for external grooves |
| long spherical/flat points | 40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external) | ±0.04mm | spherical points for grooves inside hole (large hole) flat points for external grooves |
| short spherical blade points | 24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external) | ±0.04mm | for narrow grooves inside hole (small hole) |
| long spherical blade points | 40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external) | ±0.04mm | for narrow grooves inside hole (large hole) |

Multifunctional points 7392* (optional)



Ball points 7391* (optional)



Screw thread points 7381*, 7321* (optional)



* It is necessary to use point sleeve (code 1526-T101) for these points