

MEASUREMENT ACCURACY IS NOT AFFECTED BY THE USE OF SLEEVE

HIGH PRECISION DIGITAL BLADE MICROMETERS/SNAP GAGES



ONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS 3MM

IP65
WATERPROOF

ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

NON-ROTATING SPINDLE



ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING

DATA OUTPUT



3352-25A

- Measure the groove diameter of shafts and keyways
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
0.001mm/0.00005"
0.01mm/0.0005"
- One turn of sleeve makes 5mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
Customizable measuring force range 2-12N
Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gage blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

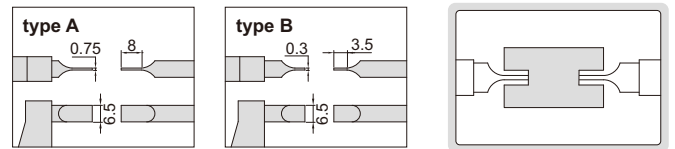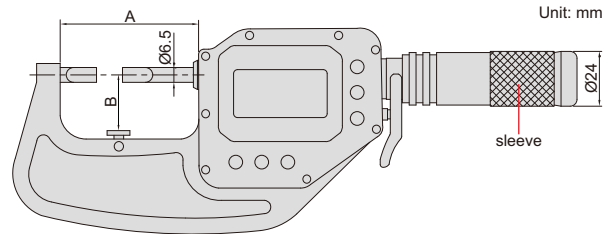

With data interface

Optional accessory:
wireless transmitter, code **7315-3350**, wireless receiver, code **7315-2, 7315-3**
data output cable (keyboard format), code **7302-3350**
data output cable (serial port format), code **7305-G60**
(cable length 3m, optional cable length maximum 15m; RS232 protocol, optional RS485 protocol)

Code	Range	Type	Accuracy	Repeatability	A	B
3352-25A*	0-25mm/0-1"	A	2μm	1μm	63mm	25mm
3352-50A*	25-50mm/1-2"	A	2μm	1μm	88mm	42mm
3352-75A*	50-75mm/2-3"	A	2μm	1μm	113mm	56mm
3352-25B*	0-25mm/0-1"	B	2μm	1μm	63mm	25mm
3352-50B*	25-50mm/1-2"	B	2μm	1μm	88mm	42mm
3352-75B*	50-75mm/2-3"	B	2μm	1μm	113mm	56mm


Built-in wireless

Optional accessory:
wireless receiver (keyboard format, connect up to 15 digital indicators), code **2134-R1**
wireless receiver (serial port format, connect up to 15 digital indicators), code **2134-R2**

Code	Range	Type	Accuracy	Repeatability	A	B
3352-25AWL*	0-25mm/0-1"	A	2μm	1μm	63mm	25mm
3352-50AWL*	25-50mm/1-2"	A	2μm	1μm	88mm	42mm
3352-75AWL*	50-75mm/2-3"	A	2μm	1μm	113mm	56mm
3352-25BWL*	0-25mm/0-1"	B	2μm	1μm	63mm	25mm
3352-50BWL*	25-50mm/1-2"	B	2μm	1μm	88mm	42mm
3352-75BWL*	50-75mm/2-3"	B	2μm	1μm	113mm	56mm

*Supplied with manufacturer inspection certificate

warning when over tolerance



wireless receiver 2134-R1, 2134-R2 (optional)

