

CABLE OF DIGITAL INDICATOR AND MULTI CHANNEL INTERFACE BOX




software CD (included)




cable of digital indicator
7309-C01



4-channel interface box
7107-1

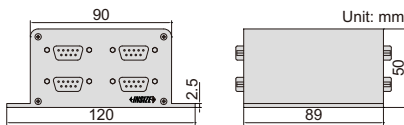

8-channel interface box
7107-2

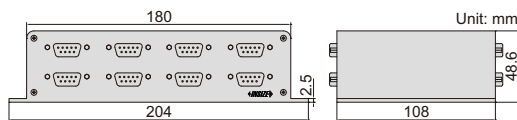

Software interface showing data monitoring with tolerance limits: out of lower limit (red), out of upper limit (red), within tolerance (green), within tolerance (green), real time reading, set zero.

collect data

4-channel interface box connection

- Software is supplied with interface boxes. In the software, it is possible to set tolerance of each channel and show judgment (red when out of tolerance, green when within tolerance), set zero, collect data manually or automatically (time is adjustable), output data to Excel, print report
- Connection box is needed (code: 7107-3) to connect interface boxes, when more than 8 indicators are used. Maximum 4 interface boxes can be connected to one connection box

CABLE SPECIFICATION

| Code | Description | Plug type to product | Socket type on product | Applicable product |
|----------|---|----------------------|------------------------|------------------------|
| 7309-C01 | cable of digital indicator (length 2 m) | | | digital indicators |

INTERFACE BOX SPECIFICATION

| Code | 7107-1 | 7107-2 |
|--|-----------------|--------|
| Quantity of digital indicators to be connected | 4pcs | 8pcs |
| Data output | RS232 and RS485 | |
| Power supply | DC 9~24V | |

CONNECTION BOX (OPTIONAL) SPECIFICATION

| Code | 7107-3 |
|---|-----------------|
| Quantity of interface boxes to be connected | 4pcs |
| Data output | RS232 and RS485 |
| Power supply | DC 9~24V |