NO AUTO POWER OFF DIGITAL INDICATORS

INSPECTION CERTIFICATE
TRACEABLE TO NIST

ONE BATTERY FOR 4000 WORKING HOURS

spindle lift knob is included

DATA OUTPUT

- No auto power off, tracking the deformation of mould and steel structure for a long time
- Low power consumption
- Button function: on/off, zero, inch/mm
- CR2032 battery
- Data output
- Optional accessory: data output cable (code **7315-, 7302-, 7305-**), backs (page 114~115), contact points (page 111~113)



2113-10

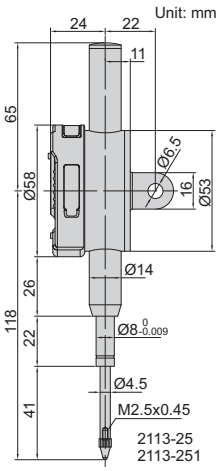

2113-251

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis	Remark
2113-101F*	12.7mm/0.5"	5μm	2μm	flat back
2113-251F*	25.4mm/1"	5μm	3μm	flat back
2113-101*	12.7mm/0.5"	5μm	2μm	lug back
2113-251*	25.4mm/1"	5μm	3μm	lug back

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis	Remark
2113-10F*	12.7mm/0.5"	20μm	10μm	flat back
2113-25F*	25.4mm/1"	20μm	10μm	flat back
2113-10*	12.7mm/0.5"	20μm	10μm	lug back
2113-25*	25.4mm/1"	20μm	10μm	lug back

*Supplied with manufacturer inspection certificate traceable to NIST USA

WATERPROOF DIGITAL INDICATORS

INSPECTION CERTIFICATE
TRACEABLE TO NIST

DATA OUTPUT

WATERPROOF

spindle lift knob is included (except **2115-101/101F, 2115-10/10F**)



2115-10

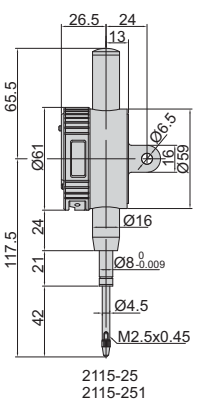

2115-25

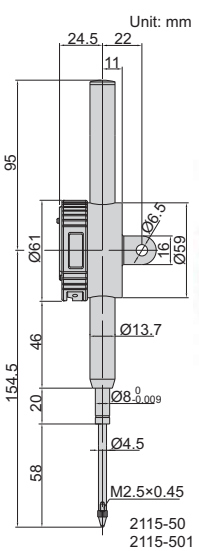

2115-50

Resolution 0.001mm/0.00005"

Code	Range	Dust/waterproof	Accuracy	Hysteresis	Remark
2115-101*	12.7mm/0.5"	IP65	5μm	2μm	lug back
2115-251*	25.4mm/1"	IP54	5μm	3μm	lug back
2115-501*	50.8mm/2"	IP54	6μm	3μm	lug back
2115-101F*	12.7mm/0.5"	IP65	5μm	2μm	flat back
2115-251F*	25.4mm/1"	IP54	5μm	3μm	flat back
2115-501F*	50.8mm/2"	IP54	6μm	3μm	flat back

Resolution 0.01mm/0.0005"

Code	Range	Dust/waterproof	Accuracy	Hysteresis	Remark
2115-10*	12.7mm/0.5"	IP65	20μm	10μm	lug back
2115-25*	25.4mm/1"	IP54	20μm	10μm	lug back
2115-50*	50.8mm/2"	IP54	30μm	10μm	lug back
2115-10F*	12.7mm/0.5"	IP65	20μm	10μm	flat back
2115-25F*	25.4mm/1"	IP54	20μm	10μm	flat back
2115-50F*	50.8mm/2"	IP54	30μm	10μm	flat back

*Supplied with manufacturer inspection certificate traceable to NIST USA

- Dust/waterproof
- Button function: on/off, zero, mm/inch
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7315-, 7302-, 7305-**), backs (page 114~115), contact points (page 111~113)