
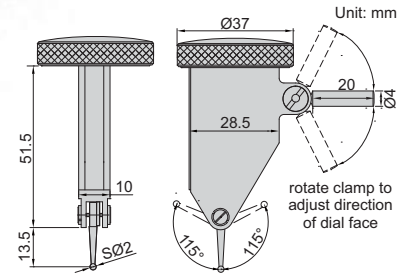


## LARGE RANGE BACK PLUNGER TYPE DIAL TEST INDICATOR

JEWELLED BEARING

INSPECTION CERTIFICATE TRACEABLE TO NIST

- Dial Reading: 0-40-0
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 117)



Code	Range	Graduation	Accuracy	Hysteresis
2480-16*	1.6mm	0.01mm	18µm	3µm

\* Supplied with manufacturer inspection certificate traceable to NIST USA



7

## ROUND BODY DIAL TEST INDICATOR

JEWELLED BEARING

INSPECTION CERTIFICATE TRACEABLE TO NIST

- Meet DIN2270
- Jeweled bearing
- Carbide contact point
- Adjustable two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 117)

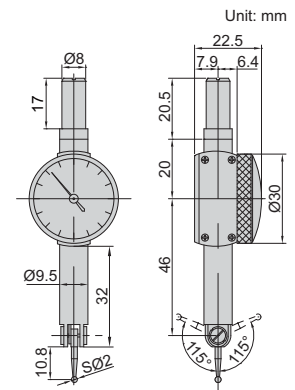


Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
2391-08*	0.8mm	0.01mm	13µm	3µm	0-40-0

\* Supplied with manufacturer inspection certificate traceable to NIST USA

## CLAMPS FOR DIAL TEST INDICATORS

Code	ØD
6298-1	Ø4mm
6298-2	Ø8mm



## STYLI FOR DIAL TEST INDICATORS



Code	For dial test indicator	Material of contact point	(mm)	
			L	D
6284-1	2380-08	steel	13.5	SØ1
6284-3	2398-08	carbide	13.5	SØ2
6284-4	2381-08	ruby	13.5	SØ2
6284-8	2399-08	carbide	13.5	SØ3
6284-21		steel	12.5	SØ1
6284-22	2380-02	carbide	12.5	SØ2
6284-24	2381-02	ruby	12.5	SØ2
6284-23		carbide	12.5	SØ3

Code	For dial test indicator	Material of contact point	(mm)	
			L	D
6284-71	2391-08	carbide	10.8	SØ2
6284-61		steel	13.5	SØ1
6284-62	2386-16A	carbide	13.5	SØ2
6284-63	2480-16	ruby	13.5	SØ2
6284-64		carbide	13.5	SØ3
6284-81		steel	27.4	SØ1
6284-82		carbide	27.4	SØ2
6284-83	2383-08A	ruby	27.4	SØ2
6284-84		carbide	27.4	SØ3