

ATTENTION: HARDNESS BLOCKS FOR CALIBRATION ARE OPTIONAL

ATTENTION: NEED TO CONFIRM IF THE WORKPIECES ARE SUITABLE BEFORE PURCHASE

## ULTRASONIC HARDNESS TESTER CODE ISHU-330

INSPECTION  
CERTIFICATE

DATA  
OUTPUT



software CD  
(included)

Application:

1. For steel material
2. Test surface hardening layers (carburized, nitriding, high frequency hardened, etc.)
3. Suitable for arc and conical surface
4. Suitable for small or light workpieces
5. Test large workpieces at any direction
6. Suitable for rough surfaces



test flat surfaces  
(with the cover)



test cylinder surfaces  
(use V-groove  
on the cover)



cover

- Small test indentation
- Test force and time are not affected by the operator
- Quick testing, only 2 seconds
- Average and statistics test modes
- Memory of 1024 test results for browsing and output
- Automatic power off
- Anti-dust and waterproof

### SPECIFICATION OF MAIN UNIT

<b>Hardness scale</b>		HV, HB, HRC, MPa
<b>Range</b>		100~940HV, 80~650HB, 20~70HRC, 370~1740MPa
<b>Resolution</b>		1HV, 1HB, 0.1HRC, 1MPa
<b>Accuracy</b>	HB	±3%
	HV	±3%
	HRC	±1.5%
<b>Data output</b>		USB
<b>Operating temperature</b>		-20°C ~ +40°C
<b>Power supply</b>		built-in rechargeable battery
<b>Dimension of main unit</b>		120×60×25mm
<b>Weight of main unit</b>		200g


### STANDARD DELIVERY

Main unit	1 pc
Probe A	1 pc
Rechargeable battery	2 pcs
Charger	1 pc
USB cable and software	1 pc

### SPECIFICATION OF PROBE

Type	A (standard)	B (optional)
Test force	50N	10N (small force)
Application	general use	plating
Maximum roughness of workpiece (Ra)	2.5μm	1.5μm
Minimum weight of workpiece (direct measurement)	0.1kg *	0.1kg *
Minimum thickness of workpiece (direct measurement)	1mm *	1mm *
Minimum radius of workpiece	5mm	5mm
Minimum thickness of surface hardening layer or plating	0.1mm	0.03mm
Minimum test area	Ø1mm	Ø1mm
Dimension and weight of probe	140×Ø37mm, 271g	145×Ø37mm, 271g

\*If the weight or thickness of workpiece is less than required, the workpiece should be fixed or coupled on solid support.

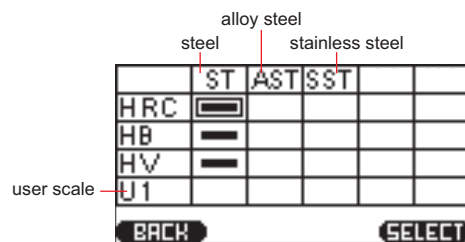

select the material and scale, use the corresponding standard hardness blocks or workpieces for calibration (calibration of HRC, HB and HV for steel are already made, calibration is needed before use other materials and scales)

### OPTIONAL ACCESSORY

Probe B	ISHU-460-B
Couplant	ISH-COUPPLANT
Hardness block HRC20~30	ISH-BHRC1
Hardness block HRC45~50	ISH-BHRC2
Hardness block HRC60~65	ISH-BHRC3
Hardness block 150~250HV5	ISH-BHV5A
Hardness block 400~500HV5	ISH-BHV5B
Hardness block 650~750HV5	ISH-BHV5C
Hardness block 75~125HBW10/1000	ISH-BHB10A
Hardness block 175~250HBW10/3000	ISH-BHB10B
Hardness block 400~500HBW10/3000	ISH-BHB10C