

DIGITAL NON-ROTATING SPINDLE DISK MICROMETERS (ECONOMIC TYPE)

ATTENTION: LOW PARALLELISM OF TWO MEASURING FACES


DATA OUTPUT

NON-ROTATING SPINDLE


- Measure root tangent length of gear
- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting standards
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)



3594-25A



Code	Range	Accuracy	Parallelism	L	b
3594-25A	0-25mm/0-1"	±4μm	5μm	43mm	32mm
3594-50A	25-50mm/1-2"	±4μm	5μm	68mm	44.5mm
3594-75A	50-75mm/2-3"	±5μm	5μm	93mm	57mm
3594-100A	75-100mm/3-4"	±5μm	5μm	118.5mm	70mm

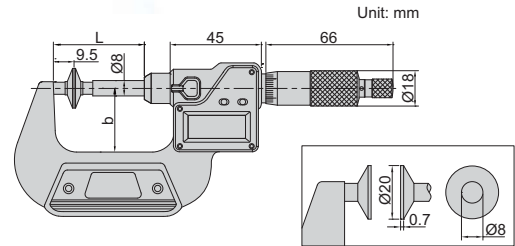


CALIPER TYPE MICROMETERS


- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)



3238-25



Code	Range	Accuracy	L
3238-25	0-25mm	5μm	56mm
3238-50	25-50mm	6μm	81mm
3238-75	50-75mm	7μm	106mm
3238-100	75-100mm	8μm	131mm

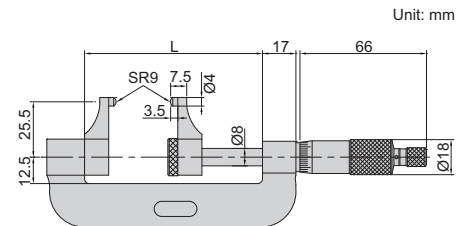


DIGITAL CALIPER TYPE MICROMETERS

DATA OUTPUT



3538-25

Code	Range	Accuracy	L
3538-25	0-25mm/0-1"	±5μm	56mm
3538-50	25-50mm/1-2"	±6μm	81mm
3538-75	50-75mm/2-3"	±7μm	106mm
3538-100	75-100mm/3-4"	±8μm	131mm

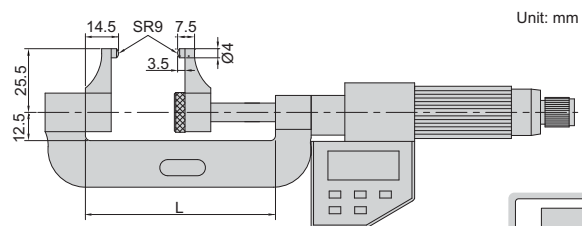

- Resolution: 0.001mm/0.00005"
- Non-rotating spindle
- Buttons: on/off, data set, mm/in, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet friction thimble
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)

