



ELECTRONIC ANALYTICAL BALANCES

INSIZE PLUS

HIGH ACCURACY

DATA OUTPUT

- Downward-mounted electromagnetic sensor
- Aluminum alloy base, wind shield, three side glass sliding doors
- Zero-setting, weighing, subtracting tare value, counting
- Checking alarm, accumulation, animal scale, percentage display
- Peak (max.) and tracking mode
- Administrator permissions
- Recipe database: 99 recipes, up to 20 ingredients per recipe
- LCD display, with backlight
- Data output
- Automatic power off
- Unit: g, mg, ct, oz, ozt, dwt, mlb, GN, tj, gj, mo

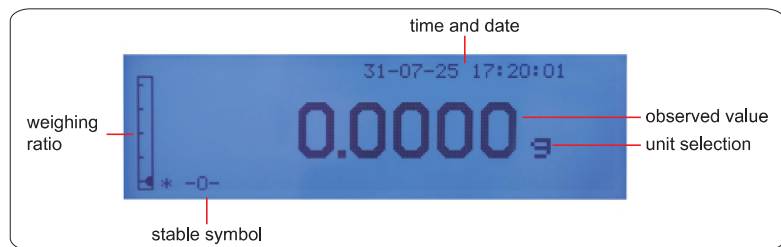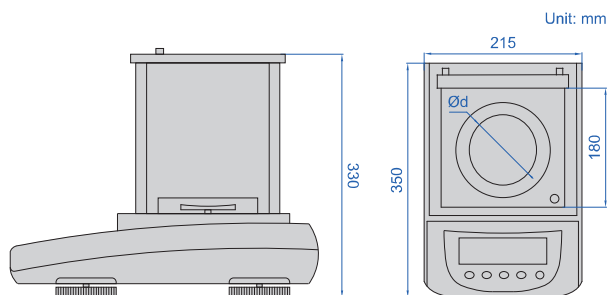

weighing test Interface

8312-220



portable ioniser (optional)



printer (optional)

SPECIFICATION

Code	8312-120	8312-220	8312-120A	8312-220A	8312-310A
Calibration method	external calibration		internal calibration		
Weighing capacity	120g	220g	120g	220g	310g
Minimal load	10mg	10mg	10mg	10mg	10mg
Readability (d)	0.1mg	0.1mg	0.1mg	0.1mg	0.1mg
Repeatability	±0.1mg				
Linearity	±0.3mg				
Stabilization time	2.5s				
Dimension of pan (Ød)	Ø80mm				
Output	RS232				
Operation temperature	18~23°C				
Operation humidity	20~85%RH				
Power supply	power adapter (24V/1A)				
Dimension (L×W×H)	350×215×345mm				

OPTIONAL ACCESSORY

RS232 cable	8311-CABLE*
Portable ioniser	8312-PI
Printer	8391-PRN10

* Used to connect with computers