

DIGITAL INSIDE POINT CALIPERS (NON-WATERPROOF)

DATA OUTPUT




- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7315-, 7302-, 7305-)



1121-150A


Code	Range	Accuracy	L	a	b	c	d	D
1121-150A	24-150mm	±0.04mm	250	5	12	16	30	∅2
1121-200A	25-200mm	±0.04mm	310	5	12.5	16	40	∅2
1121-3001A	50-300mm	±0.06mm	410	8	25	17	80	∅3

preset buttons

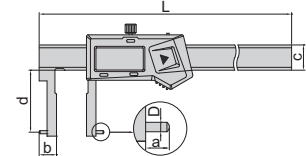

DIGITAL INSIDE GROOVE CALIPERS (NON-WATERPROOF)


DATA OUTPUT

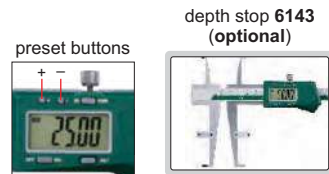

1176-150


- Measure diameter of grooves inside bores
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7315-, 7302-, 7305-, for calipers without built-in wireless)

sizes to be measured (use upper jaws)




D1	L1
∅9	<8
∅10	<15
∅11~150	<30

Code	Range of upper jaw	Range of lower jaw	Accuracy	Wireless
1176-150	9-150mm/0.35-6"	15-150mm/0.59-6"	±0.04mm	no
1176-150WL				built-in wireless

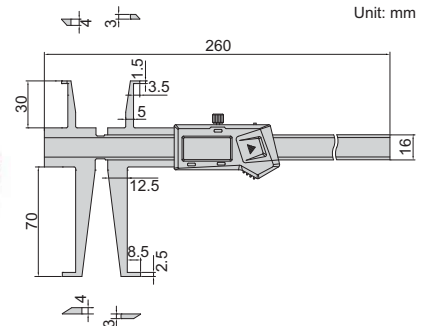

sizes to be measured (use lower jaws)




D2	L2	D2	L2
∅15	<10	∅19	<42
∅16	<18	∅20	<50
∅17	<26	∅21	<58
∅18	<34	∅22~150	<70

DIGITAL INSIDE GROOVE CALIPERS (NON-WATERPROOF)

DATA OUTPUT

- Measure diameter of grooves inside bores
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7315-, 7302-, 7305-, for calipers without built-in wireless)

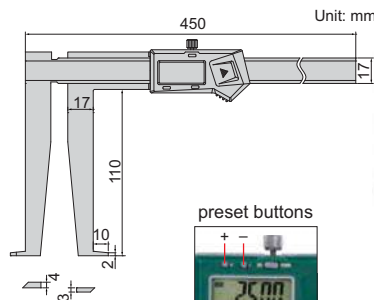


1178-300



depth stop 6143 (optional)



sizes to be measured



D1	L1
∅25	<50
∅26	<60
∅27~300	<110

Code	Range	Accuracy	Wireless
1178-300	25-300mm/1.18-12"	±0.05mm	no
1178-300WL			built-in wireless